

# 52cm Undermount Rangehood



---

## FEATURES

Aluminium grease filters,  
750m<sup>3</sup>/hr extraction, Push button controls,  
3 speeds, 2 × LED lights

# Congratulations on your new InAlto 52cm Undermount Rangehood!

## INSTALLATION


Please refer to the dimensions of your rangehood shown in the diagram below.

When positioning the rangehood for installation and use, we advise that the rangehood is mounted at a height of between 600–800mm above the cooking surface for safety and performance of your rangehood.

Gas cooktops must have a minimum of height of 650mm from the burner to the underside of the rangehood.

Electric cooktops must have a minimum height of 600mm from the cooktop surface to the underside of the rangehood.


For a complete guide, refer to your user manual pages 8–11.

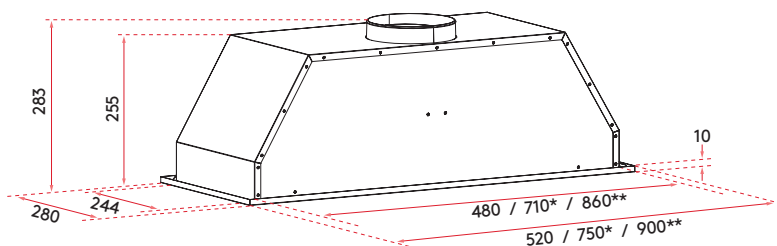

## THE CONTROLS

Your Flat Glass Rangehood Controls

- 1 Stop
- 2 Low Fan Speed
- 3 Medium Fan Speed
- 4 High Fan Speed
- 5 Light

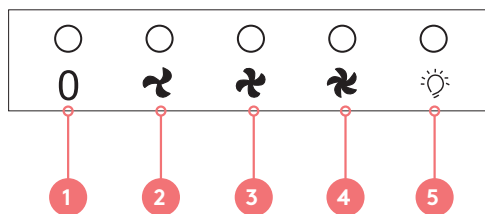

For a complete guide on operating your rangehood refer to user manual on page 12.

## DETAILS

Product Size (W, D, H):  
520mm x 280mm x 283mm

## SUPPORT

Telephone: 1300 11 4357  
Email: [support@residentiagroup.com.au](mailto:support@residentiagroup.com.au)